




PABOGOMMA S.A.S. Via F.lli Rosselli n° 19/8 - 31020 Fontane di Villorba (TV)
 Tel. 0422 608 713 Fax 0422 618 971
 e-mail pabogomma@pabogomma.it Web www.pabogomma.it
 C.F. P. IVA e Registro Imprese Treviso 00178000261

ROTA-CURED-SHEETS

Article- number	Thickness mm	Width m	Length m	Flashover potential kV
4031 99089	3.5	1.40	10	20

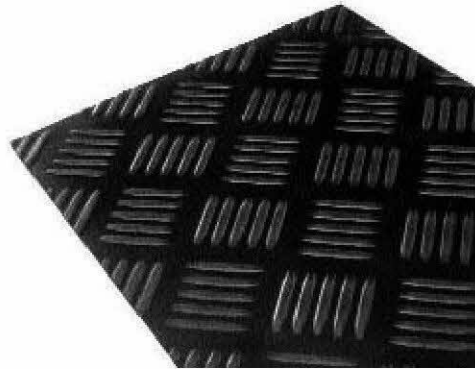

WORKING TEMPERATURE RANGE

Medium	dyn. (stat.)	max.	short-term
Air	(-20) °C	+70 °C	+90 °C

COMPRESSION SET DIN ISO 815

Duration	Temperature	CS
22 h	70 °C	50 %

- ④ NR-SBR, black - specification
- ④ insulating matting tested according to VDE 0303-21: 1999
- ④ 20 kV dielectric strength
- ④ marked by vulcanettes
- ④ surface design: D70 (one side hammerblow design, one side fabric impression)
- ④ packaging see General Information

Hardness [Shore A]:	65 ±5
Density [g/cm ³]:	1.60
Tensile strength [N/mm ²]:	5
Elongation at break [%]:	250
Ozone resistance:	non resistant
Weather resistance:	non resistant
Oil resistance:	non resistant
Benzine resistance:	non resistant
Acid resistance:	moderately resistant
Strong bases:	resistant
Abrasion resistance:	moderately suitable